

# Rubber Covered Neodymium (NdFeB) Pot Magnets

## Strong Holding Force, resistant to corrosion, protects against surface damage

The arrangement of magnets and the rubber coating is ideal for use on surfaces which should not be scratched and / or where movement or slippage of a normal metal pot magnet system is a problem. This makes its use recommended for painted or varnished articles, or for applications where a strong magnetic force is needed, without marking or scratching surfaces.

The multi-pole structure of the magnets ensures a dense magnetic field on the holding surface. This allows good holding on thin surface eg. lacquered car body metal. The side displacement forces are extremely good due to the suction effect of the rubber surface.

The rubber protects the magnet in humid conditions where corrosion is likely. The holding force is not weakened even after years of use.




## Threaded Neck

Product No.	Diameter mm	Height mm	Overall Height mm	Thread size mm	Holding Force kgs	Colour	Coating
E851	22	6	12.5	M4x6.5	5	Black	Santoprene Rubber
E853	43	6	21	M6x15	8.5	Black	Santoprene Rubber
E854	66	8.5	23.5	M8x15	18	Black	Santoprene Rubber
E855	88	8.5	23.5	M8x15	42	Black	Santoprene Rubber



## Screwed Bush

Product No.	Diameter mm	Height mm	Overall height (including bush length) mm	Bush Diameter mm	Tread size	Holding Force kgs	Colour	Coating
E851/1	22	6	11.5	8	M4	5	Black	Santoprene Rubber
E853/1	43	6	10.5	8	M4	8.5	Black	Santoprene Rubber
E854/1	66	8.5	15	10	M5	18	Black	Santoprene Rubber
E855/1	88	8.5	17	12	M8	42	Black	Santoprene Rubber

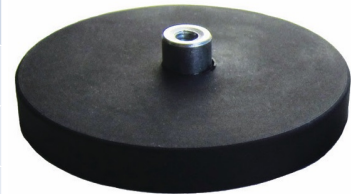

## Internal Thread

Product No.	Diameter mm	Height mm	Tread size	Holding Force kgs	Colour	Coating
E851/2	22mm	6mm	M4	3.5	Black	Santoprene Rubber
E853/2	43mm	6mm	M4	8.5	Black	Santoprene Rubber
E854/2	66mm	8.5mm	M6	18	Black	Santoprene Rubber
E855/2	88mm	8.5mm	M6	42	Black	Santoprene Rubber



[www.eclipsemagnetics.com](http://www.eclipsemagnetics.com)